

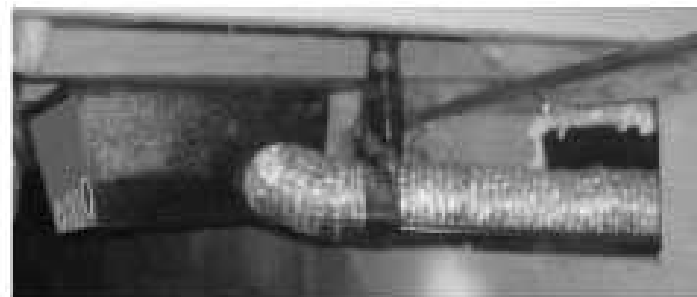


# MOISTURE SCRUBBER


## Install Instructions

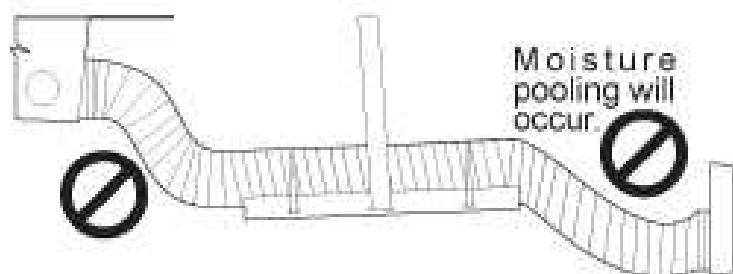

### INSTALLED VIEW

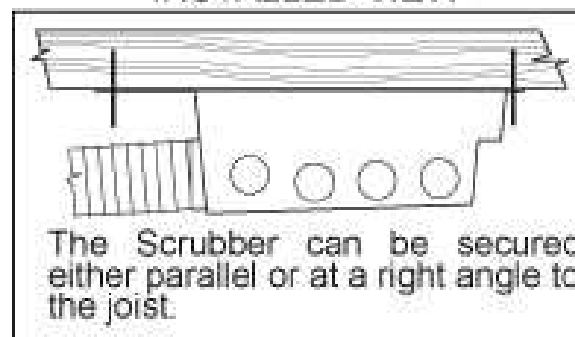

The Moisture Scrubber is very easy to install. Existing 8" x 16" foundation vents do not need to be altered. We recommend that you retain the unit in it's box until you are at the installation location for the protection of the Moisture Scrubber and for your convenience.

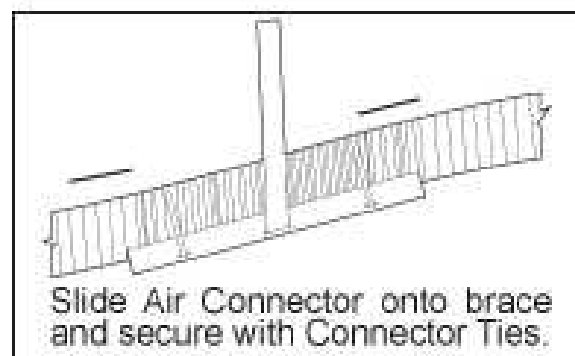

1. The unit should be left in the box until you reach the point of installation, [ it will be easier to move in the crawl space & prevent damage]. Once you reach the installation point, remove the unit and cut all of the white shipping ties. The Box Scrubber is screwed at the 4 corners of the top. It must locate above the foundation vent and allow the Shoe Inlet Housing to be inserted into the foundation vent.
2. Locate the Shoe Inlet Housing into the foundation vent and foam completely around the shoe until an air tight seal is achieved, see "Installed View".
3. Locate the Air Connector Brace about mid way under the Air Connector and tack the Fiberglass straps to the floor system [usually the joist]. Insure the Air Connector has a downward slop towards the vent. Slide excess Air Connector on either side of the Brace onto the Brace until a downward slop is achieved. Secure the Air Connector with the Connector Ties.
4. Re-adjust the Fiberglass strap until a downward slop is achieved. Remember, you will be using gravity to direct the accumulated moisture to the out side of the vent.
5. Use the 4 foundation blanks provided to seal the remaining vent opens [Using the foam]. More vent blanks can be ordered from our web site or over the phone, if required.

**THIS UNIT IS TO BE USED IN CONJUNCTION WITH THE ZEUS UNIT IN OPERATION. FAILURE TO HAVE THE ZEUS IN OPERATION MAY RESULT IN MOISTURE ACCUMULATION IN THE CRAWL SPACE.**

See other side for important timer setting.